


# Mod. **PCB**




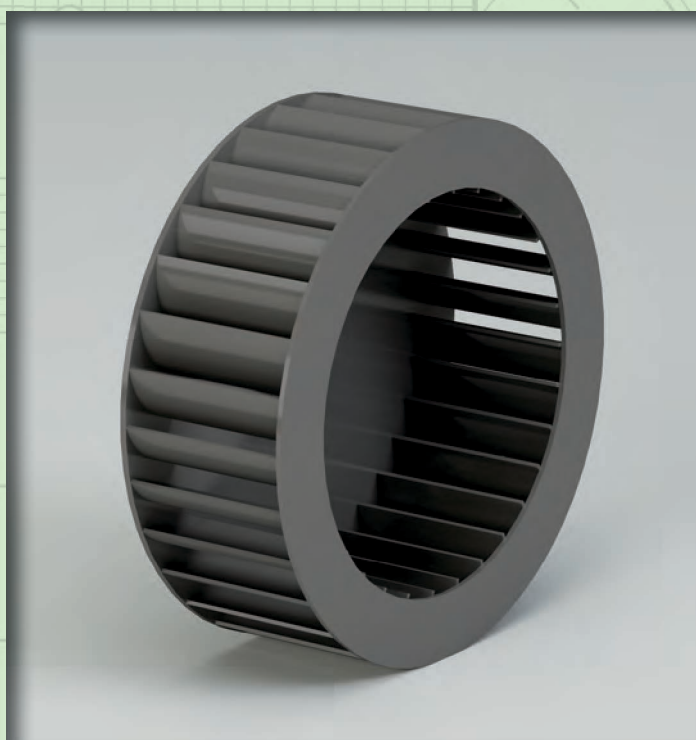


$Q = 90 \div 600 \text{ m}^3/\text{h}$









$Q = 0.025 \div 0.17 \text{ m}^3/\text{s}$

$p_t = 7 \div 60 \text{ mmH}_2\text{O}$

$p_t = 70 \div 600 \text{ Pa}$

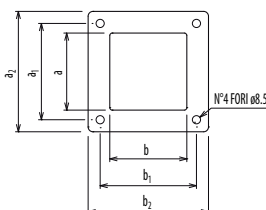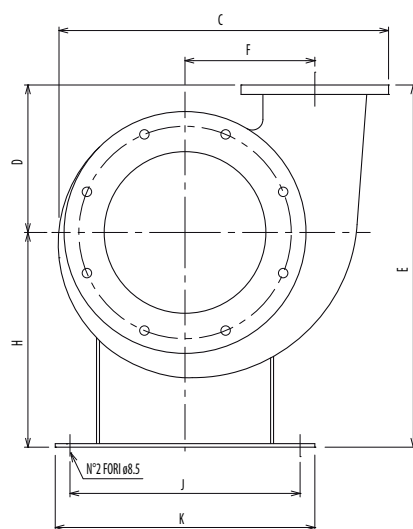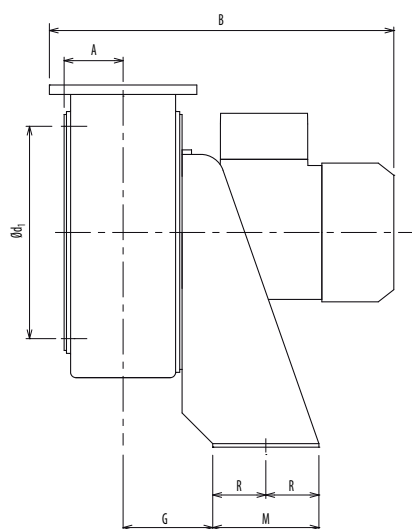

Ulteriori informazioni e quote:  
 ■ **Ultérieures informations et cotes:**  
 ■ **Further information and sizes:**  
 ■ **Weitere Infos und Größen:**  
 ■ **Más informaciones y medidas:**



TIPO - Type		PESO	PD <sup>2</sup>																								
VENTILATORE	MOTORE	Weight		A	B	C	D	E	F	G	H	J	K	M	R	a	a <sub>1</sub>	a <sub>2</sub>	b	b <sub>1</sub>	b <sub>2</sub>	d	d <sub>1</sub>	d <sub>2</sub>	Ø	N	
Fan	Motor	Kg	Kg x m <sup>2</sup>																								
PCB11	56 M2	6	0.01	42	250	206	87	216	65	70	129	130	160	70	35	68	88	108	68	88	108	102	133	150	8	4	
	56 M4	6	0.01		250																						
PCB16	63 M2	9	0.02	50	280	280	125	307	110	76	182	195	220	90	45	80	100	125	80	100	125	150	180	200	8	8	
	63 M4	9	0.02		280																						

## CARATTERISTICHE IN MANDATA

CARACTERISTIQUES EN SOUFFLAGE DELIVERY CHARACTERISTICS LEISTUNGSMERKMALE CARACTERISTICAS EN EMPUJE

TIPO • Type		P inst. Install. P [kW]	n	Tolleranza sulla portata ±5% • Tolérance sur le débit ±5% • Load tolerance ±5% • Durchsatztoleranz ±5% • Tolerancia respecto caudal ±5%									
VENTILATORE Fan	MOTORE Motor			Q [m³/h]									
				90	100	150	200	250	300	350	400	500	600
				pt[mmH <sub>2</sub> O]									
PCB11/4	56	0,09	1350	7	7	6							
PCB11/2	56	0,09	2800			24	24	22	21				
PCB16/4	63	0,12	1350				17	17	16	14			
PCB16/2	63	0,18	2820							63	64	64	60